

ROTAMAT® Complete Plant Ro 5HD




Complete Plant with Hydro Duct

- Well-proven mechanical preliminary treatment equipment
- High grit separation efficiency
- Optional separate grease chamber with grease removal
- Optional grit washing

►► Features

The ROTAMAT® Complete Plant Ro 5HD combines the benefits of both aerated and unaerated grit traps by using a high-performance grit trap with a small overall plan area. The wastewater flows firstly through an inlet screen that retains, washes, compacts and dewateres the solids contained within the flow. The screened wastewater then passes into an aerated grit trap that reduces the settlement of organics within the flow by the action of an aeration system within the grit trap. Grease along with other greasy material are collected in a separate integrated grease trap chamber from where the grease is automatically discharged by a well-proven paddle system. The flow then enters a second unaerated upflow grit trap chamber which contains an integral hydro duct that ensures a directed flow approach **from the bottom** of the chamber with positive and uniform upflow distribution. The flow velocity in the unaerated grit trap chamber is reduced to such an extent that very fine grit is easily and reliably separated. Whilst the separated particles are removed from the grit trap by classifying screws, they are simultaneously being statically dewatered prior to being discharged into a container.

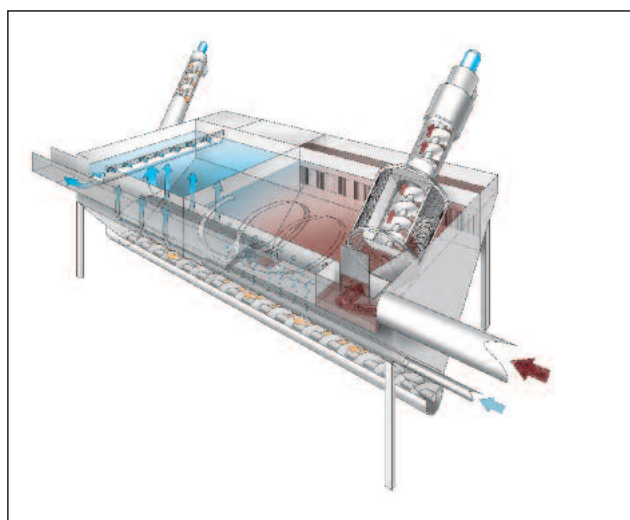

Schematic drawing of a ROTAMAT® Complete Plant Ro 5HD

►► Benefits

- Small footprint and space-saving compact design
- Fully integrated screenings separation, washing and dewatering in one system
- Very high levels of grit separation of 95 % of grain size 0.20 - 0.25 mm
- Optional separate grease chamber with semi-automatic grease removal system
- Above-ground or underground installation
- Integral emergency overflow in the grit trap as standard
- Optional grit washing system
- Optional integral emergency by-pass
- Made of stainless steel for maximum corrosion protection
- For any throughput up to 160 l/s



Semi-automatic grease removal by means of a paddle system

HUBER SE

Industriepark Erasbach A1 · D-92334 Berching
Phone: + 49 - 84 62 - 201 - 0 · Fax: + 49 - 84 62 - 201 - 810
info@huber.de · Internet: www.huber.de

Subject to technical modification
1,5 / 3 – 8.2010 – 4.2005

ROTAMAT® Complete Plant Ro 5HD